




ARTHOUSE **SOLID** LUXURY VINYL PLANK



20
YEARS
WEAR
GUARANTEE

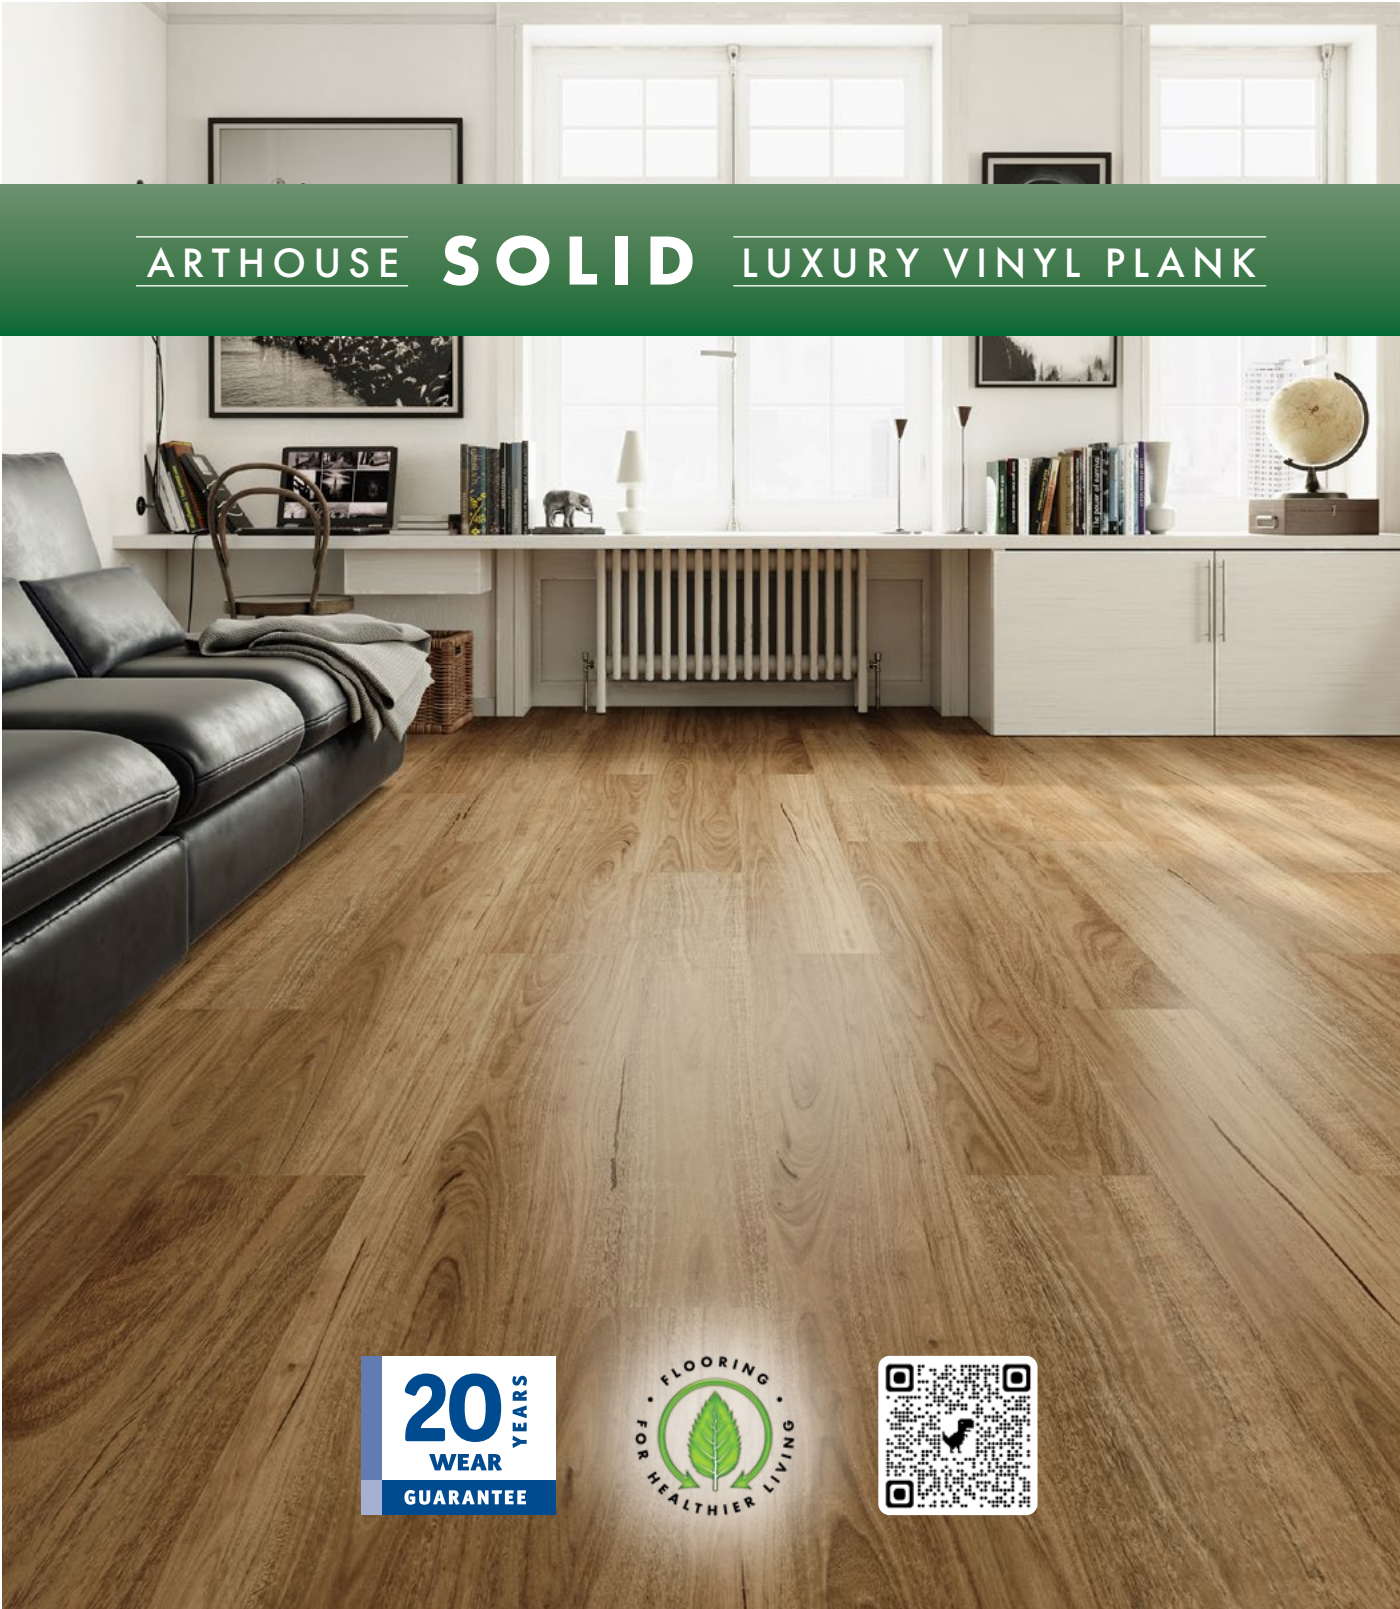



Arthouse SOLID Luxury Vinyl Plank flooring is hard wearing and easy to maintain – making it ideal for **RESIDENTIAL** or **COMMERCIAL** use.

Available in 8 Australian Timber inspired, all natural grains.



FLOATING FLOORS
PART OF THE PEGULAN GROUP

| ITEM | STANDARD | SPECIFICATION |
|--|---------------------------------|---------------------------------|
| Size | EN ISO 24342 | 1523 x 228 mm plank |
| Overall thickness | EN ISO 24346 | 2.50 mm |
| Wear layer thickness | EN ISO 24340 | 0.55 mm |
| Surface | High Density Polyurethane (PUR) | |
| Weight per m ² | EN ISO 23997 | 4.35 kg /m ² |
| Quantity per Carton | | 4.19 m ² (12 planks) |
| Squareness and straightness | EN ISO 24342 | ≤ 0.25 mm |
| Dimensional stability after exposure to | EN ISO 23999 | ≤ 0.25 % |
| Curling after exposure to heat | EN ISO 23999 | ≤ 1.0 mm |
| Residual Indentation | EN ISO 24343-1 | ≤ 0.1 mm |
| Usage Classification | EN ISO 10582 | 23/33/42 |
| Abrasion resistance | EN 660-2 | T |
| Slip Resistance | EN 13036-4 | 30 |
| | DIN 51130 | R9 |
| Colour fastness to artificial light | EN ISO 105 B02 | ≥ 6 |
| Effect of castor chair | ISO 4918 | No Change |
| Impact Sound Reduction | EM ISO 10140 | 2 dB |
| Resistance to staining | EN ISO 26987 | No Change |
| Heavy metals | Rohs | Not Detected |
| Phthalate | EN 14372 | Not Detected |
| Formaldehyde Emission | EN 717-1 | E1 |
| Fire Classification | EN 13501-1 | Bfl-s1 |
| Hazardous Chemical Safety Testing - SVHC | REACH - No SVHC | SGS AYAA18-62889 |
| Emissions - VOC | ISO 16000-06 | A+ |



The Wear Warranty applies to the original purchaser, when used and maintained according to Floating Floors' specifications. The following is covered by the Floating Floors Floor Coverings warranty. 1. Apparent defects, indicated to Floating Floors or to the Place of Purchase prior to installing, such as: appearance defects, structure defects, indelible stains, defects on the backing other than back printing. 2. Surface pattern wear through, indicated to Floating Floors or to the Place of Purchase during the specified Wear Warranty period. You may submit details and proof of your claim to Floating Floors Floor Coverings for consideration.

This warranty is provided in addition to the other rights and remedies you may have under law. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. (Head Office): Address – 14-16 Lakewood Boulevard, Braeside 3195. Phone: 03 9586 8400 Fax: 03 9587 5700 Email: info@FloatingFloors.com.au

Plank size: 1523 mm x 228 mm

Thickness: 2.5mm

Wear-layer: 0.55 mm, plus

High Density Poly-Urethane (PUR) Coating

www.floatingfloors.com.au/arthouse_lvt